

90XL Dialysis Reference Meter

90XL Meter




The 90XL is a state-of-the-art, portable, multifunction meter designed to measure the conductivity, pH, temperature, and pressure of dialysate fluids from hemodialysis delivery systems, dialysate concentrates, as well as water from purification systems.

Accurate • **Convenient** • **Reliable**

- The 90XL has a large, easy-to-read screen that displays data from up to four sensors simultaneously.
- On-screen prompts provide detailed instructions for meter calibration.
- The 90XL's unit of measure can be tailored to your individual preferences.
- A help feature and on-screen prompts are always available to guide you through the calibration and configuration process.



LARGE, EASY-TO-READ DISPLAY!

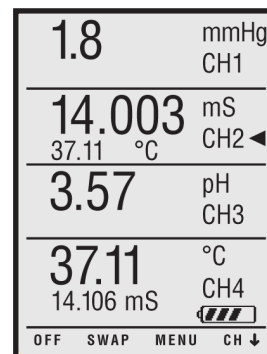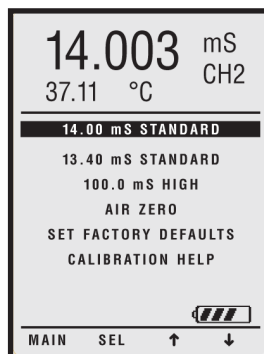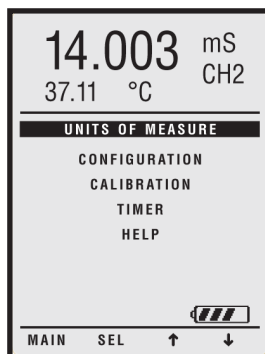

90XL Dialysis Reference Meter

- Mesa Labs' reputation for quality and reliability is built into each 90XL.
- Advanced, patent pending, measurement technology in the 90XL provides the highest performance in the industry.
- An on-screen battery indicator monitors the battery life of the rechargeable lithium-ion battery.
- The 90XL has the long-term stability required for the most demanding applications.
- The lithium-ion battery provides longer battery life between charges.

Convenience

- Up to four sensors in any combination can be installed on the 90XL and viewed simultaneously on the large display.
- The 90XL provides conductivity measurements at both high and low levels for use with dialysis delivery systems and water purification systems. One meter does it all.
- The compact design of the 90XL makes it easy to handle and to transport.
- Display module cover/holder protects the display from damage and allows the use of an IV pole holder.

Product Specifications

Technical Specifications

	pH	Conductivity	Temperature	Pressure
<i>Range</i>	0 to 14 pH units	0 to 200.0 mS	10 to 90°C	-600 to +1600 mmHg
<i>Resolution</i>	0.01 pH units	0.1 µS from 0 - 80 µS 0.001 from 0 to 22.00 mS 0.01 from 22.00 to 80.00 mS 0.1 above 80.00 mS	0.01°C	0.1 mmHg
<i>Accuracy</i>	+/- 0.1 pH units	±0.35% of reading + 0.002mS from 0 to 1.99 mS ± 0.20% of reading + 0.002 from 2 to 29.99 mS ± 0.50% of reading above 30 mS	+/- .1°C	±1.0 mmHg from 0 to 199 mmHg gauge ± 1.5 mmHg from 200 to 300 mmHg gauge ± 0.5% of reading + 1 mmHg above 300 mmHg and below 0 mmHg
<i>Temperature Compensation</i>		10 to 90°C (optimized for 20 to 40°C)		

Physical Specifications

Dimensions	Weight	Power	Battery Type
3.3" x 6" x 1.5"	9.9 ounces	Battery	3.6 V Lithium-ion, rechargeable



Display Module Cover